
ALUTRUSS Truss Set QUADLOCK 6082 square 7.71x7.71x3.5m (WxDxH)

Art. No.: 20000375

GTIN: 4026397336634





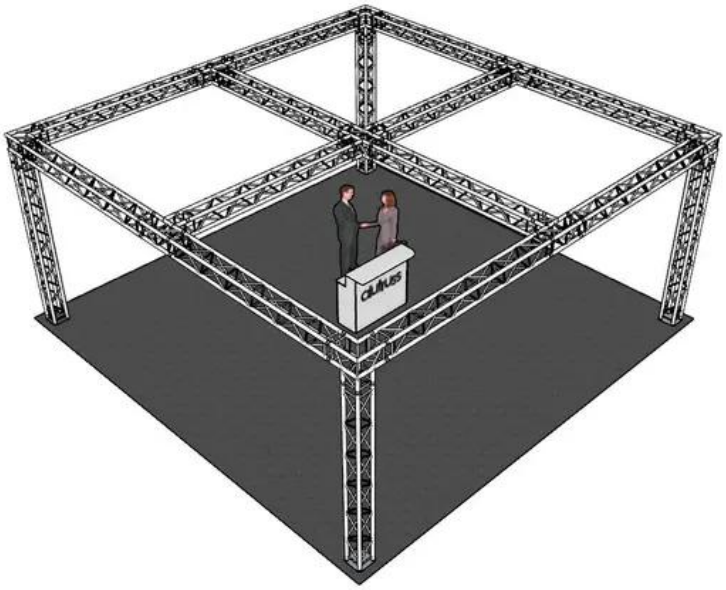





Features:

Logistic

EAN / GTIN: 4026397336634

ALUTRUSS QUADLOCK 6082-3000 4-way Cross Beam

4-point truss system

- Strong EN-AW 6082 alloy for high loads
- High-quality aluminum-tubes with 50 mm in diameter
- Low weight
- Distance center - center: 240 mm
- Easy installation
- Trusspipe: 50 mm
- Suitable for Towertruss TQTR
- Any RAL color available on request
- Available in various colors and sizes
- TÜV Süd certified
- Made in Europe
- For application areas such as: Clubs/dancing school
- For further information about this product, please refer to the Data Sheet under "Downloads"

ALUTRUSS QUADLOCK 6082L-30 3-way Corner 90°

4-point truss system

- Strong EN-AW 6082 alloy for high loads
- High-quality aluminum-tubes with 50 mm in diameter

Eurolite®, Futurelight®, PSSO®, Roadinger®, Alutruss®, Europalms® and Dimavery® are trademarks of Steinigke Showtechnic GmbH, Andreas-Bauer-Straße 5, DE-97297 Waldbüttelbrunn
All rights reserved. Subject to change without notice. Errors and omissions excepted.Illustration only. Actual item may differ from photo.

- Low weight
- Distance center - center: 240 mm
- Easy installation
- Trusspipe: 50 mm
- Suitable for Quadlock 6082; Towertruss TQTR
- Any RAL color available on request
- Various versions available
- Made in Europe
- For application areas such as: Theater; Trade fair and shop fitting; clubs/dancing school

ALUTRUSS QUADLOCK 6082T-35 3-way T-Piece

4-point truss system

- Strong EN-AW 6082 alloy for high loads
- High-quality aluminum-tubes with 50 mm in diameter
- Low weight
- Distance center - center: 240 mm
- Easy installation
- Trusspipe: 50 mm
- Any RAL color available on request
- Made in Europe
- For application areas such as: Theater; Trade fair and shop fitting; clubs/dancing school

ALUTRUSS QUADLOCK 6082C-41 4-way Cross Piece

4-point truss system

- Strong EN-AW 6082 alloy for high loads
- High-quality aluminum-tubes with 50 mm in diameter
- Low weight
- Distance center - center: 240 mm
- Easy installation
- Trusspipe: 50 mm
- Made in Europe
- For application areas such as: Theater; Trade fair and shop fitting; clubs/dancing school

ALUTRUSS QUICK-LOCK Spare Pivot with Pin

QUICK-LOCK set

- Accessories for the robust truss system with QUICK-LOCK
- For use with TRI/QUAD system
- Trusspipe: 50 mm
- Made in Europe

ALUTRUSS QUADLOCK End Plate QQGP-Male M-10

Baseplate for mobile use (connectors 6082 included)

- Easy installation
- The article is delivered pre-assembled
- Trusspipe: 50 mm
- Made in Europe
- Application possibility: Standing
  half cone
- M10 thread

Technical specifications:

Weight:	328.88 kg

Eurolite®, Futurelight®, PSSO®, Roadinger®, Alutruss®, Europalms® and Dimavery® are trademarks of Steinigke Showtechnic GmbH, Andreas-Bauer-Straße 5, DE-97297 Waldbüttelbrunn
All rights reserved. Subject to change without notice. Errors and omissions excepted.Illustration only. Actual item may differ from photo.

ALUTRUSS QUADLOCK 6082-3000 4-way Cross Beam

Setup:	Easy installation
Trusspipe:	50 mm x 2 mm
Welding technique:	TIG-welding
Welding material:	AlMg 5
Alloy:	EN-AW 6082 T6 (AlSi1Mg)
Material:	Aluminum
Color:	Alu colored; any RAL color available on request
Strut diameter x thickness:	16 x 2mm
Dimensions:	Length: 300 cm Width: 29 cm Height: 29 cm
Weight:	15.34 kg

ALUTRUSS QUADLOCK 6082L-30 3-way Corner 90°

Setup:	Easy installation
Corner angle:	90°
Trusspipe:	50 mm x 2 mm
Welding technique:	TIG-welding
Welding material:	AlMg 5
Alloy:	EN-AW 6082 T6 (AlSi1Mg)
Material:	Aluminum
Color:	Alu colored; any RAL color available on request
Strut diameter x thickness:	16 x 2mm
Dimensions:	Length: 50 cm Width: 50 cm Height: 50 cm
Weight:	8.20 kg

ALUTRUSS QUADLOCK 6082T-35 3-way T-Piece

Setup:	Easy installation
Corner angle:	90°
Trusspipe:	50 mm x 2 mm
Welding technique:	TIG-welding
Welding material:	AlMg 5
Color:	Alu colored; any RAL color available on request
Strut diameter x thickness:	16 x 2mm
Dimensions:	Length: 71 cm Width: 50 cm Height: 29 cm
Weight:	8.20 kg

Eurolite®, Futurelight®, PSSO®, Roadinger®, Alutruss®, Europalms® and Dimavery® are trademarks of Steinigke Showtechnic GmbH, Andreas-Bauer-Straße 5, DE-97297 Waldbüttelbrunn
All rights reserved. Subject to change without notice. Errors and omissions excepted.Illustration only. Actual item may differ from photo.

ALUTRUSS QUADLOCK 6082C-41 4-way Cross Piece

Setup:	Easy installation
Corner angle:	90°
Trusspipe:	50 mm x 2 mm
Alloy:	EN-AW 6082 T6 (AlSi1Mg)
Color:	Alu colored
Strut diameter x thickness:	16 x 2mm
Dimensions:	Length: 71 cm Width: 71 cm Height: 29 cm
Weight:	10.90 kg

ALUTRUSS QUICK-LOCK Spare Pivot with Pin

Trusspipe:	50 mm
Color:	Alu colored
Weight:	0.09 kg

ALUTRUSS QUADLOCK End Plate QQGP-Male M-10

Setup:	Easy installation
Trusspipe:	50 mm
Alloy:	EN-AW 6082 T6 (AlSi1Mg)
Material:	Aluminum
Color:	Alu colored
Dimensions:	Length: 30.7 cm Width: 30.7 cm Height: 5 cm
Weight:	1.55 kg
Thread:	M10 thread

Scope of delivery:

16 x ALUTRUSS QUADLOCK 6082-3000 4-way Cross Beam

1 x truss
1 x connection set

4 x ALUTRUSS QUADLOCK 6082L-30 3-way Corner 90°

1 x corner
2 x connection set

4 x ALUTRUSS QUADLOCK 6082T-35 3-way T-Piece

2 x connection set

1 x ALUTRUSS QUADLOCK 6082C-41 4-way Cross Piece

3 x connection set

Eurolite®, Futurelight®, PSSO®, Roadinger®, Alutruss®, Europalms® and Dimavery® are trademarks of Steinigke Showtechnic GmbH, Andreas-Bauer-Straße 5, DE-97297 Waldbüttelbrunn
All rights reserved. Subject to change without notice. Errors and omissions excepted.Illustration only. Actual item may differ from photo.

8 x ALUTRUSS QUICK-LOCK Spare Pivot with Pin

2 x splint
2 x bolt

4 x ALUTRUSS QUADLOCK End Plate QQGP-Male M-10

1 x plate
4 x half cone

Eurolite®, Futurelight®, PSSO®, Roadinger®, Alutruss®, Europalms® and Dimavery® are trademarks of Steinigke Showtechnic GmbH, Andreas-Bauer-Straße 5, DE-97297 Waldbüttelbrunn
All rights reserved. Subject to change without notice. Errors and omissions excepted.Illustration only. Actual item may differ from photo.