
OMNITRONIC XIRA-215A Active 2-Way Speaker FIR-DSP

Active speaker with 15" woofer, 1.35" driver, 300 W RMS LF, 50 W RMS HF

Art. No.: 11039019

GTIN: 4026397699678



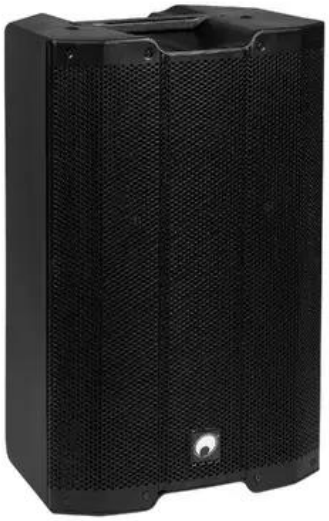







Features:

- Active PA speaker system for touring applications and permanent installations
- DSP-controlled biamp amplifier (class D)
- 2-way bassreflex enclosure with 38 cm woofer and 3.5 cm titanium driver
- Line input (XLR/6.3 mm jack) with separate level control
- Mic/line input (XLR/6.3 mm jack) with separate level control
- Mixed output for linking further active speaker systems
- Digital signal processor FIR Filter
- DSP presets: MUSIC; DJ; MONITOR; SUB
- Dual flange
- Black metal grille
- 2 Rugged carrying handles
- Application possibility: Standing; monitoring; on stand
- For application areas such as: Clubs/dancing school; mobile use; mobile djs / entertainer; rental

Logistic

EAN / GTIN: 4026397699678
Weight: 23,25 kg
Length: 0.48 m
Width: 0.44 m
Heigth: 0.75 m

Technical specifications:

Power supply:	230 V AC, 50 Hz
Power consumption:	Max. 400 W
Protection class:	Protection class I
Power connection:	Mains input via IEC connector (M) mounting version power supply cord with safety plug (provided)
Power:	Rated: 300W RMS LF

Eurolite®, Futurelight®, PSSO®, Roadinger®, Alutruss®, Europalms® and Dimavery® are trademarks of Steinigke Showtechnic GmbH, Andreas-Bauer-Straße 5, DE-97297 Waldbüttelbrunn
All rights reserved. Subject to change without notice. Errors and omissions excepted.Illustration only. Actual item may differ from photo.

	Rated: 50W RMS HF
Frequency range:	40 - 20000 Hz
Sensitivity:	96 dB
Max. SPL:	121 dB
DSP:	Digital signal processor FIR Filter
DSP presets:	MUSIC; DJ; MONITOR; SUB
Attachment system:	Dual flange: Ø 35mm (0° / 5°)
Circuitry:	Class D Biamp
Control elements:	Power switch, level control per channel, Input sensitivity switch, tone control
Controls:	Limiter
Status LED:	Power, signal, clip, DSP presets
Connections:	Output: line via 1 x 3-pin XLR
Input channels:	1 x mono with mic-line switch via Combination socket (XLR/jack), channel control via rotary dial 1 x mono via Combination socket (XLR/jack), channel control via rotary dial
Speaker:	1 x woofer 15" Voice coil compression tweeter highs 1.35"
Type of speaker:	Compact cabinet speaker
Type of construction:	Vented
Carrying handle:	2 pc/pcs
Material:	Plastic
Color:	Black
Dimensions:	Length: 41 cm Width: 43 cm Height: 70 cm
Weight:	21.35 kg

Scope of delivery:

1 x top
1 x user manual
1 x power cord

Eurolite®, Futurelight®, PSSO®, Roadinger®, Alutruss®, Europalms® and Dimavery® are trademarks of Steinigke Showtechnic GmbH, Andreas-Bauer-Straße 5, DE-97297 Waldbüttelbrunn
All rights reserved. Subject to change without notice. Errors and omissions excepted.Illustration only. Actual item may differ from photo.